

DATA SHEET


Sports-Cote FLOOR SEAL

Water-based Polyurethane
Wood Floor Sealer



Sports Floor Design

Sports-Cote FLOOR SEAL

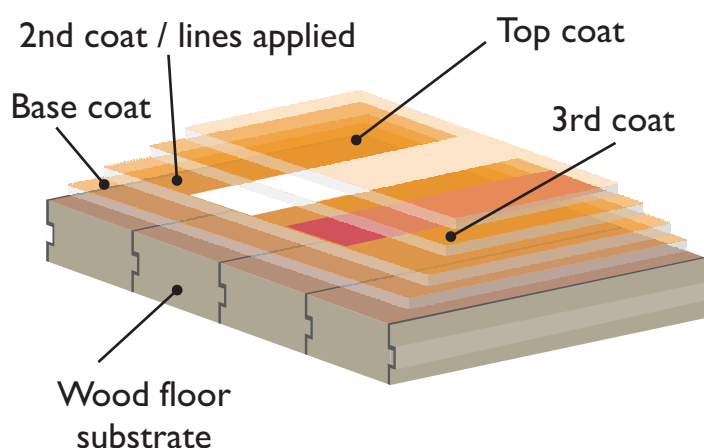

Description

Sports-Cote FLOOR SEAL is a single-pack water-based sealer specifically designed for application to natural wood sports surfaces.

Sports-Cote FLOOR SEAL is formulated using water-based polyurethane technology which provides an environmentally safe sealer with the necessary player/surface interaction to meet current standards.

Uses

Sports-Cote FLOOR SEAL Sports-Cote FLOOR SEAL is used as a sealer for natural wood sports surfaces.

Sports-Cote FLOOR SEAL rapidly develops hardness, abrasion resistance and scuff resistance, making it the ideal choice of product where a swift return to play and durability are the key requirements. The sealer also imparts slip resistance to comply with BS 7044-4.

Sports-Cote FLOOR SEAL utilizes UV-resistant polyurethane technology and its non-yellowing properties make it ideal for sealing white wood sports surfaces.

Sports-Cote FLOOR SEAL is available in gloss, satin and matt finishes.

Model Specification

- Product: **Sports-Cote FLOOR SEAL**
- Number of coats: Minimum of two
- Finish: Gloss, satin or matt
- Preparatory work: Supplier's instructions
- Application: Supplier's instructions
- Supplier: Sports Coatings Limited
- Contact: Technical Services Department
01440 766366

Preparatory Work

Any dust, wax or polishes must be removed prior to the application of **Sports-Cote FLOOR SEAL**.

The condition and evenness of the surface will determine the sanding belt grit size. However, the first sand is usually undertaken using a 60 grit belt, with subsequent sands requiring 80, 100 and 120 grit belts.

When sealing oak floors and to inhibit the extraction of tannins from the substrate, a primer must be applied (please contact our Technical Service Department).

Note: to ascertain compatibility with a given surface, it is advisable to undertake a trial area.

DATA SHEET

Sports-Cote FLOOR SEAL

Water-based Polyurethane
Wood Floor Sealer



Application

Sports-Cote FLOOR SEAL should be applied using a short-pile roller.

Any raised grain may be removed between coats with a light sanding.

Thinning

Since **Sports-Cote FLOOR SEAL** is supplied as a low viscosity, ready for use material, no thinning is necessary.

Application Conditions

Wood floor sealing should only be undertaken when the substrate temperature is higher than 5°C and likely to remain so for 6-7 hours after this.

Packaging

5 litre units.

Coverage

1st coat: 8-10m²/litre

Subsequent coats: 10-15m²/litre

Note: coverage will vary depending on substrate porosity, application temperature and technique.

Technical Information

Touch dry:	Ca. 1 hour at 20°C & 60% relative humidity
Sanding:	Ca. 4 hours at 20°C & 60% relative humidity
Hard cure:	Ca. 24 hours at 20°C & 60% relative humidity
Full chemical cure:	Ca. 72 hours at 20°C & 60% relative humidity
Slip resistance:	complies with BS 7044 - 4

Activity Lines

Activity lines can be installed using **Sports-Line Polyurethane** (please contact our Technical Service Department).

Shelf Life

Sports-Cote FLOOR SEAL has a shelf life of approximately 12 months in original, unopened packaging.

Storage

Store above 5°C in an environment safe from frost.

Aftercare and Maintenance

Sweeping or vacuuming is the preferred method of aftercare and maintenance for Sports-Cote FLOOR SEAL. If required, the sealer can be mopped using a proprietary detergent.

Health & Safety

Sports-Cote FLOOR SEAL is a water-based sealer, making it relatively safe to use and minimising the risk of environmental impact from its usage. For more detailed information please refer to **Sports-Cote FLOOR SEAL**'s current Material Safety Data Sheet.

Further Information

To ensure you are applying a fit for purpose floor seal please contact our Technical Service Department.



Sports Coatings Ltd

Hawthorn House, Helions Bumpstead Road,
Haverhill, Suffolk CB9 7AA, England

Tel: +44 (0)1440 766366

Fax: +44 (0)1440 768897

Email: admin@sportscoatings.com

Web: www.sportscoatings.com



Sports Coatings is an Everlac Company